Material List:

Arched GreenHouse

All Pipe is 1" Sch 40 PVC


hunt4jc@ncws.com

December 2002

(unless otherwise specified)

Page 1 of 3

ASSEMBLE BASE FRAME:

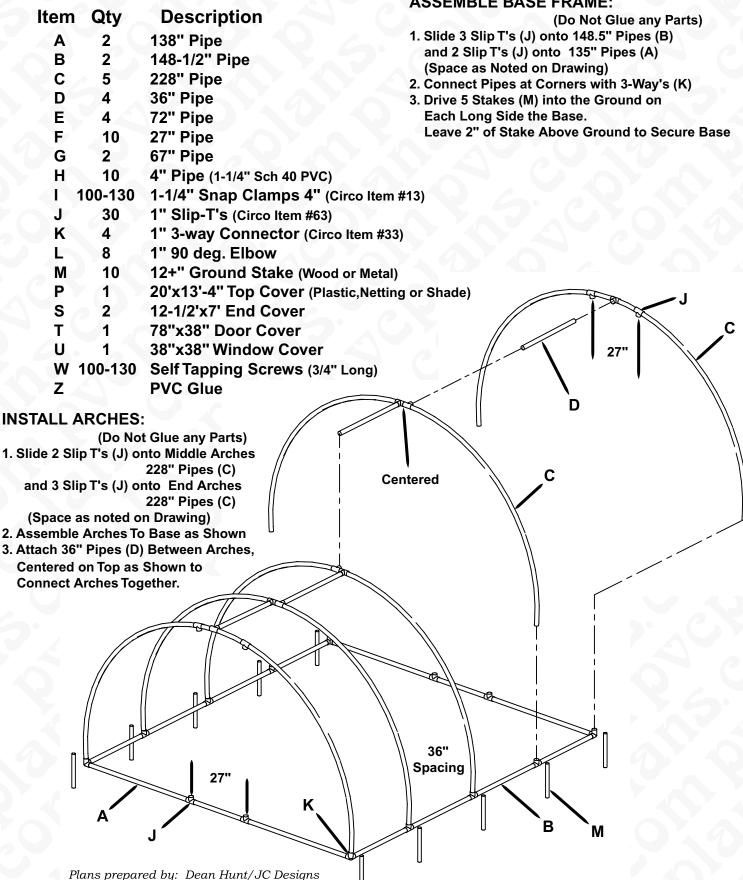

Arched GreenHouse Hinge Page 2 of 3 Latch ASSEMBLE DOOR & DOOR FRAME: Fig. 1 1. Glue 2 Pieces of 1-1/4" PVC x 4" (H) Together To Create Hinges as Shown. Make 4 Hinges. Fig. 3 2. Glue 1 Piece 1-1/4" x 4" (H) to 1 SnapClamp (I) To Create Latches as Shown. Make 2 Latches Fig. 2 3. Slide a Slip-T (J) onto each Door Frame Side (E) Locate 4" Down from Top. 4. Slide Hinges and Latch onto Door Frame Sides Positioned as Shown in Fig. 3 5. Connect the Two Door Frames with 27" Pipe (F) Assemble into Slip-T's on Arch and Base on Front of GreenHouse. 6. Slide Door Side Pipe (G) Through Hinges on Door Frame and Then Assemble Door as Shown in Fig 1. with Middle Support Pipe (F) Located in the Center of the Door. Adjust Latch as Needed. 7. Slide Hinges to Farthest Positions Up & Down to Hold Door in Position Securely. Fig. 4 Latch Hinge Latch Hinge ASSEMBLE WINDOW & WINDOW FRAME: 1. Slide 2 Slip-T's (J) onto Window Frame Sides (E) Locate 4" Down from Top and 27" Apart. 2. Slide Latch onto 27" Window Frame Top (F) and 2 Hinges onto 27" Window Frame Bottom (F) **Connect Top and Bottom Window Frame to Side** Window Frames and Assemble into Slip-T's on Arch and Base on Back of GreenHouse. 3. Slide Window Bottom Pipe (F) Through Hinges on Window Frame and Then Assemble Window as Shown in Fig 4. Adjust Latch as Needed. 4. Slide Hinges to Farthes Positions Side to Side To Hold Window in Position Securely. Plans prepared by: Dean Hunt/JC Designs hunt4ic@ncws.com December 2002

Arched GreenHouse

Page 3 of 3

COVER AND SECURE THE ARCHED GREEN HOUSE:

- 1. Cover the Door with Covering (T) Use SnapClamps (I) Spaced 8 10" apart to Secure the Covering to the Door.
- 2. Cover the Window with Covering (U) Use SnapClamps (I) Spaced 8 10" apart to Secure the Covering to the Window.
- 3. Cover the Top with Covering (P) Using SnapClamps (I) Spaced 8 10" apart to Secure the Covering to the Top.
- 4. Cover the Ends with Covering (S) Using SnapClamps (I) Spaced 8 10" apart to Secure the Covering to the Ends.
- 5. Glue Fittings as Needed.
- 6. Screw Self Tapping Screw (W) into any Clamps, Hinges, or Latches as Needed.
- 7. Secure Green House to Gound with Stakes, Sandbags or Blocks.
- 8. Trim Excess Coverings.

These Plans are Free and Therfore we do not Warrent or Garauntee the Structure Built from Them.

